

Properties	Standards	Values
Technical Characteristics		
Tensile Strength	ASTM D412	200 p.s.i. min.
Flexibility	ASTM F137	Pass
Friction	ASTM D2047	> .90
Static Load	ASTM F970 (modified)	400 p.s.i.
Impact Insulation	ASTM E492-04	54
Sound Transmission	ASTM E413-04	54
Noise Reduction	ASTM C423-08a	.1
Elongation at Break	ASTM D412	75% min.
CHPS Section 01350	ASDM D5116	Pass
Chemical Resistance	ASTM F925	Excellent
Dimensional Characteristics		
Thickness	8 mm Standard	
Weight	1.73 lb/sq.ft	
Interlocking Tile	24" x 24" 23" x 23" <i>Actual size may vary with colors</i>	
Square Edge Tile	36" x 36" Standard 24" x 24" Custom	
Rolled Sheet	4' x 30' Standard <i>50ft max. length available</i>	
Maintenance	<p>See current maintenance guidelines for more information</p>	

Key points:



Description :

Made from nearly 100% recycled rubber, Dropzone is an ideal flooring system for a variety of applications. Whether in rolls or tiles Dropzone is suitable for Fitness Centers, Health Clubs, Heavy Traffic Areas, Training Facilities, Ice Rink Hallways, Field Houses, Stadiums, Pro Shops, and many more.

3 types of installation :

- Interlocking Tile
- Full Spread Glue
- Installation on Tarkolay (Sheet Material Only)

Surface Texture: Slight

Compatible Installation :

Properly constructed concrete, wood, asphalt, and cementitious underlayments. See installation guidelines for more information.

Installation instructions and maintenance guide:

On request





Recycled Content (>90% Post Consumer)

Group 1 Colors 10% EPDM

Group 2 Colors 20% EPDM

Group 3 Colors 30% EPDM

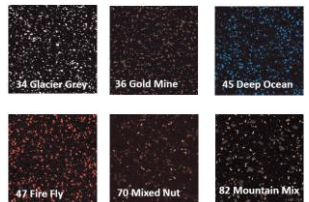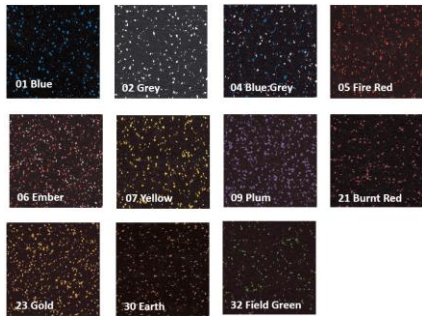

Compatible Substrates: Properly constructed and prepared Concrete, Wood, Asphalt, and Cementitious Underlayments

Refer to current installation guidelines, ASTM F710, ACI 302.2R, and other industry standard recommendations for more information.

We reserve the right to modify these specifications without affecting their compliance with standards. Some results may slightly vary in relation to certain flexibilities found within specified testing procedures and manufacturing tolerances.



Potential LEED Credits:
Tarkett Sports chooses sustainability in concert with performance. Please contact your area representative for assistance.

TARKETT SPORTS
175 N. Industrial Blvd Ne.
Calhoun, Georgia, 30701
800 364-6541
www.tarkettsports.com